

REBLOC RB120AS-7.5

Standard element


Installation
Anchored soil

H4b

W2



Containment level **H4b** (covers H3, H2, H1, N1, T3, T2 and T1)
Working width **W2** (covers W3, W4, W5, W6, W7 and W8)
Impact severity level **ASI B**

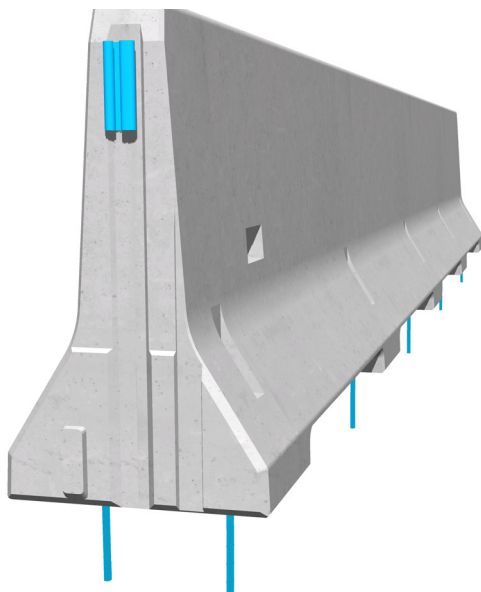

Precast concrete vehicle restraint systems are used for long lasting protection on the central reservation and along the verge. Vehicles deviating from the road are retained or redirected and prevent a dangerous breakthrough onto the opposite carriageway.

The installation is carried out on compacted soil and no additional foundation is necessary. The high safety level is ensured by the anchor pins responsible for a low system movement.

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

A Division of Hill & Smith Ltd, Hillside, Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF


REBLOC RB120AS-7.5

Standard element

H4b

W2

Technical data

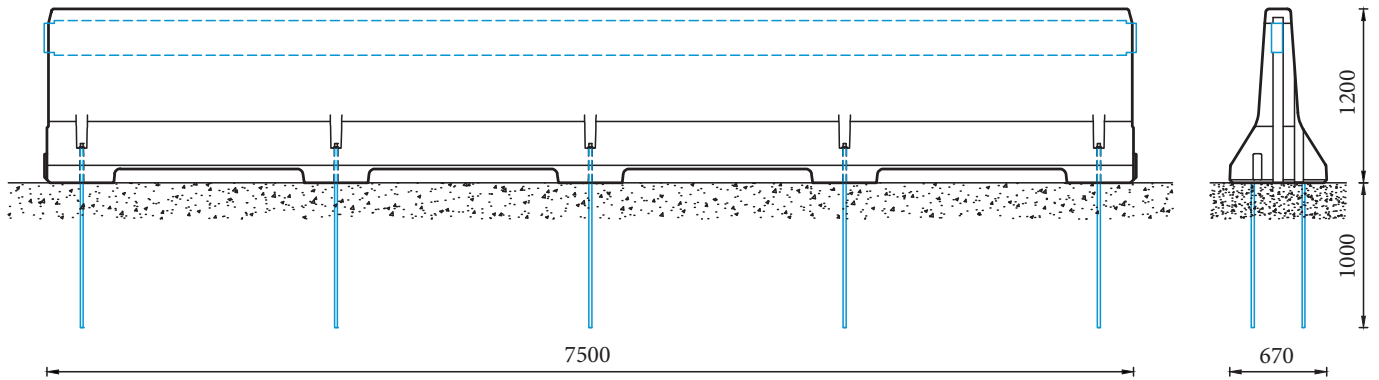

all dimensions in mm

Containment level	H4b
Working width	W2
Impact severity level	ASI B
Vehicle intrusion	VI7
Installation	anchored soil (10 x anchor pins REPIN20-1280 in compacted soil per element)
Terminal elements	not necessary, optional available
Dimensions L x W x H in mm	7500 x 670 x 1200 mm
Weight/element (approx.)	6,000 kg
Elements/truck (24 t)	4 elements
Minimum installation length	82.5 m (not including terminal elements)
Curve radius	$r \geq 250$ m
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓