

REBLOC RB84XEAL_8

Standard element

H2

W1

Installation
Embedded



Containment level


H2 (covers H1, N1, T3, T2, T1)

Working width

W1 (covers W2, W3, W4, W5, W6, W7, W8)

Impact severity level

ASI B

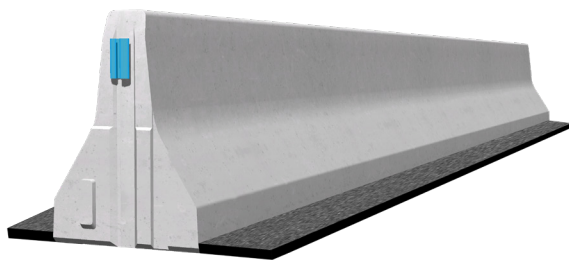

The vehicle restraint system 84XEAL_8 is embedded 40 mm in asphalt or concrete and is mainly used, where a high containment level is needed within a narrow space.

The installation of short barrier sections is possible due to a short minimum installation length. REBLOC RB84XEAL_8 is available with drainage openings.

The system is also available free standing with performance data N2/W3.

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

A Division of Hill & Smith Ltd, Hillside, Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF


REBLOC RB84XEAL-8

Standard element

H2

W1

Technical data

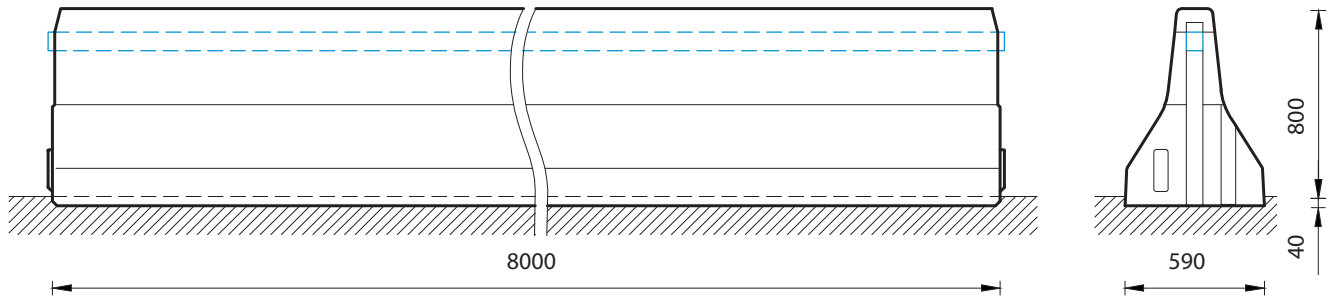

all dimensions in mm

Containment level	H2
Working width	W1
Impact severity level	ASI B
Installation	40 mm embedded in asphalt/concrete
Terminal elements	not necessary, optional available
Dimensions L x W x H in mm	8000 x 590 x 840 mm
Weight/element (approx.)	4600 kg
Elements/truck (24 t)	5 elements
Minimum installation length	40 m
Curve radius	$r \geq 260$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Vehicle intrusion	VI2
CE certification	✓

System elements - combinable (optional)



Standard element
REBLOC 84XEAL-4T