




# REBLOC RB185A\_4\_5A

Precast concrete

Installation  
Anchored

H4A

W1

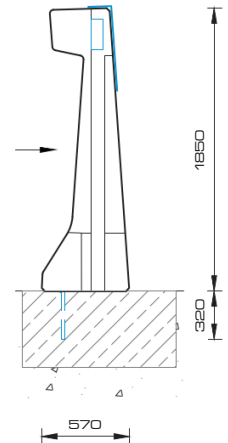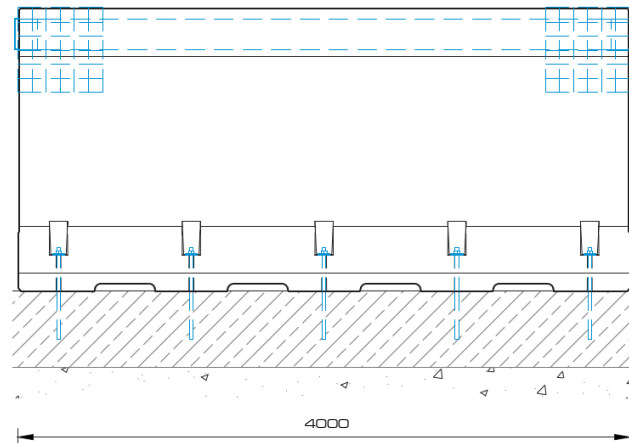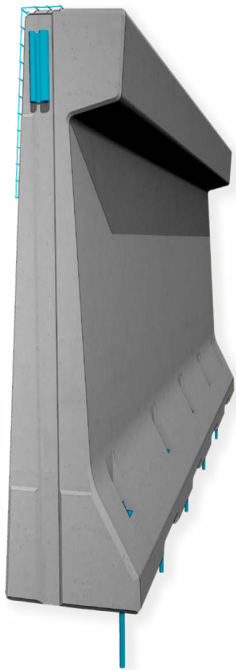

Measurements in MM

Containment level  
Working width  
Impact severity level

H4A  
W1  
ASI B

Containment level	H4A
Working width	W1 ( $W_N \leq 0.6\text{m}$ )
Impact severity level	ASI B
Installation	Anchored (5x adhesive anchor M24 in concrete foundation)
Application	Single-sided
Dimensions L x W x H in mm	4000 x 570 x 1850 mm
Weight/element	approx. 5700 kg
End anchorage	not necessary, optional available
Minimum installation length	44 m (11 elements)
Curve radius	$r \geq 80\text{ m}$ , smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓
Vehicle Intrusion	VI2 ( $VI_N \leq 0.8\text{m}$ )

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

A Division of Hill & Smith Ltd, Hillside, Gotham Road,  
Kingston-on-Soar, Nottingham, NG11 0DF