

# REBLOC RB80XA\_6\_8A


Standard element

Application  
Permanent System

Installation  
Anchored

H2

W1

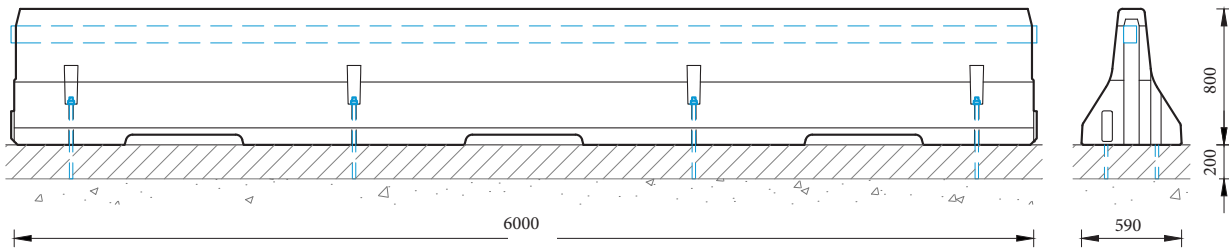

all dimensions in mm

Application	single-sided   double-sided
Containment level	H2
Working width	W1 ( $W_N \leq 0.6$ m)
Impact severity level	ASI B
Vehicle intrusion	VI1 ( $VI_N \leq 0.6$ m)
Installation	anchored in asphalt   concrete (per element 8 x adhesive anchors M20)
Initial/End Anchorage	not necessary, optional available
Dimensions L x W x H in mm	6000 x 590 x 800 mm
Weight/element	approx. 3460 kg
Elements/truck (24 t)	6 elements
Minimum installation length	36 m (6 elements)
Curve radius	$r \geq 175$ m, smaller radii on request
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
CE certification	✓



 0115 983 2304

 [sales@hardstaffbarriers.com](mailto:sales@hardstaffbarriers.com) | [enquiries@hardstaffbarriers.com](mailto:enquiries@hardstaffbarriers.com)

 A Division of Hill & Smith Ltd, Hillside, Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF