


# REBLOC TO STEEL GUARDRAIL SINGLE SIDED TRANSITION

N2

W2

## Technical data

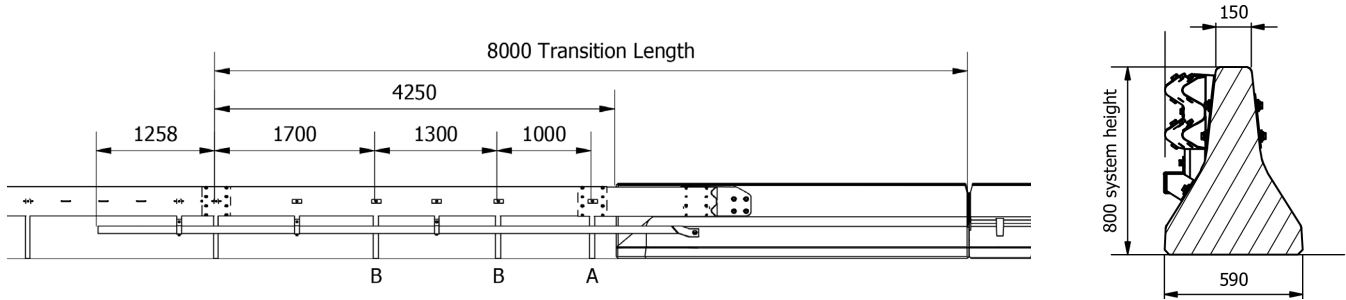

all dimensions in mm

Containment Level	N2
Working Width	W2
Impact Severity Level	C
Normalised Working Width	$W_n = W2 (0.7m)$
Normalised Dynamic Deflection	$D_n = 0.1m$
Dimensions L x W x H in mm	8000 x 590 x 800 mm
Weight/Element	242 kg (1209 Kg including concrete element)
Durability:	S275/S355 Galvanised to EN ISO 1461/ Reinforced concrete C30/37
Tested Accreditations	DD ENV 1317-4:2002
Compatible Steel Elements	SPR4- Single Sided N2W1 SPR4- Single Sided N2W2 SPR4- Single Sided N2W3 Flexbeam PLUS- Single Sided N2W1 (1.2m Line Post Centres) Flexbeam PLUS- Single Sided N2W2 (2.0m Line Post Centres) Flexbeam PLUS- Single Sided N2W3 (2.8m Line Post Centres) <small>**for connection to steel VRS systems not listed here, please contact <a href="mailto:technical@hill-smith.co.uk">technical@hill-smith.co.uk</a></small>
Compatible Concrete Elements	RB80XA_8 RB84XEAL_8 RB84XEA.3_8

0115 983 2304

sales@hardstaffbarriers.com | enquiries@hardstaffbarriers.com

Hardstaff Barriers, A Division of Hill & Smith Infrastructure, Hillside,  
Gotham Road, Kingston-on-Soar, Nottingham, NG11 0DF