

REBLOC RB80XAU_8_5A

Standard element

H2

W1

Installation
Anchored

Application
Permanent System



Containment level

H2 (covers H1, N1, T3, T2 and T1)

Working width


W1 (covers W2, W3, W4, W5, W6, W7 and W8)

Impact severity level

ASI B

Technical data

Containment level	L2 / H2
Working width	W1
Impact severity level	ASI B
Installation	anchored (5 x M20 adhesive anchors in concrete per element)
Vehicle intrusion	VI2
Dimensions L x W x H in mm	8000 x 450 x 800 mm
Weight/element	approx. 4030 kg
Application	Unilateral
Minimum installation length	56 m (7 elements)
Curve radius	$r \geq 235$ m, (inside of the curve) $r \geq 110$ m (outside of the curve)
Coupling/exposed steel parts	fully integrated, exposed parts hot-dip galvanized
Initial/end anchorage	Not necessary, optional available
CE certification	✓

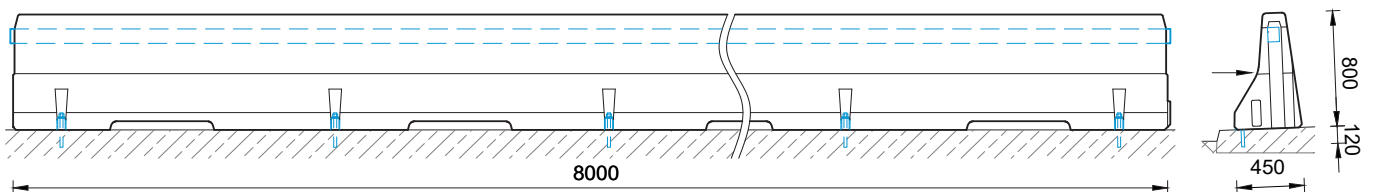

all dimensions in mm